


NBK® Standard V-Pulley

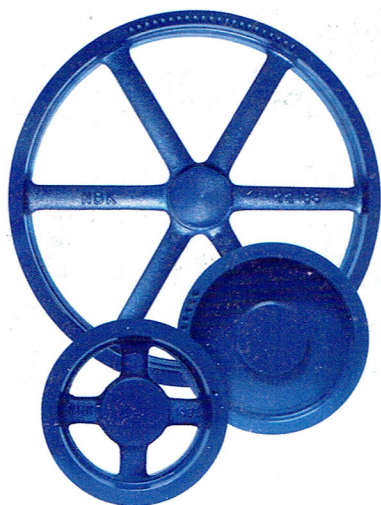

NBK The Most Reliable Brand Name

NBK Standard V-Pulleys have been regarded as ones with the best and most reliable quality since 1950 when we standardized them in Japan for the industries. Our incessant innovation for the manufacturing process, molding, pouring, machining, balancing and coating, have been taken the state of art quality into reality.

FC 200 Quality Castings

Castings for **NBK** Standard V-Pulleys are produced in our modernized foundry. The quality of cast iron is maintained by Electric Induction Furnaces and Automatic Molding Machines.

High Precision Machining

NBK Standard V-Pulleys are precisely machined by Automatic Lathes.

Well Balancing

NBK Standard V-Pulleys are well balanced by Static Balancing Machine and free from vibration or noise due to unbalance of pulleys.

Baking Paint


NBK Standard V-Pulleys are painted in dark blue colour and baked in an oven. The baking paint realizes a strong and rust-free finish.

Bore & Keyway

In order to guarantee the final quality of **NBK** Standard V-Pulleys, we can finish a bore and a keyway in accordance with the specified dimensions and tolerances. A keyway is finished speedy, precisely and economically by Broaching Machine.

How To Order

Please specify the nominal diameter, groove section and number of grooves when ordering. Nominal diameter is outside diameter in inch.

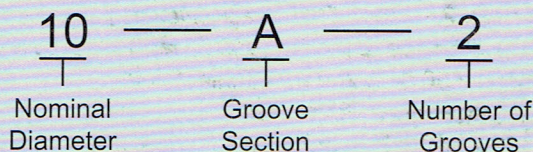


Type

S : 3 Arm Type
U : Solid Type
X : 4 Arm Type
Y : 6 Arm Type

In accordance with our established policy to constantly improve our products, the specifications contained herein are subject to change without notice.

NBK Standard V-Pulleys are produced by PT. Himalaya Nabeya Indonesia under the license of Nabeya Bi-tech Kaisha

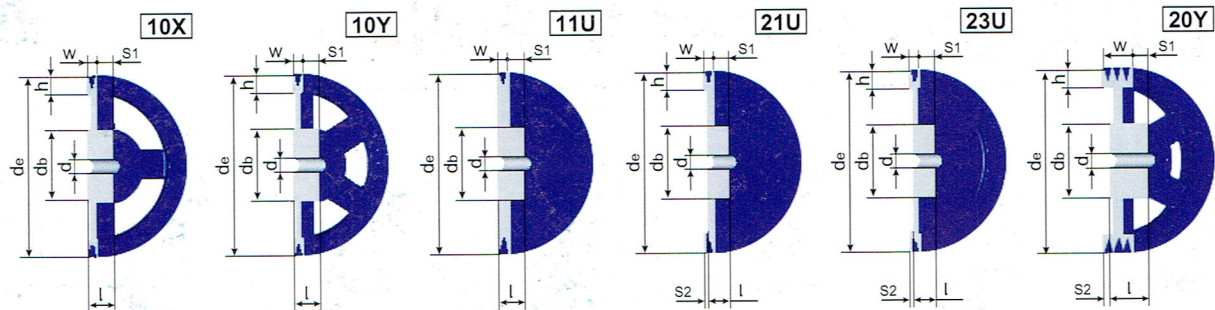

A-1 w = 20

unit : mm

A-2 w = 36

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	I	S1	S2		
2	A1	41.8	50.8	11U	37	33	13	14	0.3
2 1/2	A1	54.5	63.5	11U	41	36	16	21	0.5
3	A1	67.2	76.2	21U	44	24	17	25	0.6
3 1/2	A1	79.9	88.9	21U	44	24	19	25	0.7
4	A1	92.6	101.6	21U	48	28	19	25	0.9
4 1/2	A1	105.3	114.3	23U	50	28	15	28	1.0
5	A1	118.0	127.0	23U	50	30	17	28	1.2
5 1/2	A1	130.7	139.7	23U	50	30	17	28	1.4
6	A1	143.4	152.4	20X	50	30	12	28	1.3
6 1/2	A1	156.1	165.1	20X	52	30	12	28	1.4
7	A1	168.8	177.8	20X	55	30	12	30	1.6
8	A1	194.2	203.2	20X	55	30	12	30	1.9
9	A1	219.6	228.6	20X	55	30	12	30	2.1
10	A1	245.0	254.0	10X	61	32	12	32	2.5
11	A1	270.4	279.4	10X	61	32	12	32	2.7
12	A1	295.8	304.8	10X	61	32	12	32	3.0
13	A1	321.2	330.2	10X	61	35	15	32	3.4
14	A1	346.6	355.6	10X	68	35	15	38	3.8
15	A1	372.0	381.0	10X	68	37	17	38	4.1
16	A1	397.4	406.4	10X	70	37	17	38	4.5
18	A1	448.2	457.2	10X	76	37	17	42	5.2
20	A1	499.0	508.0	10X	76	37	17	42	5.9
22	A1	549.8	558.8	10Y	76	43	23	42	7.9
24	A1	600.6	609.6	10Y	76	45	25	42	9.6


Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	I	S1	S2		
2	A2	41.8	50.8	11U	37	58	22	14	0.5
2 1/2	A2	54.5	63.5	11U	43	55	19	21	0.8
3	A2	67.2	76.2	21U	44	30	19	24	0.8
3 1/2	A2	79.9	88.9	21U	47	30	19	25	1.0
4	A2	92.6	101.6	21U	50	30	19	25	1.3
4 1/2	A2	105.3	114.3	21U	57	30	19	25	1.6
5	A2	118.0	127.0	22U	57	30	19	25	1.7
5 1/2	A2	130.7	139.7	22U	63	30	19	25	2.0
6	A2	143.4	152.4	22U	63	30	19	25	2.2
6 1/2	A2	156.1	165.1	22U	63	30	19	25	2.4
7	A2	168.8	177.8	20X	69	38	10	38	2.7
8	A2	194.2	203.2	20X	69	38	10	38	3.1
9	A2	219.6	228.6	20X	69	38	8	38	3.5
10	A2	245.0	254.0	20X	69	38	8	38	3.8
11	A2	270.4	279.4	20X	75	38	8	42	4.3
12	A2	295.8	304.8	20X	75	36	6	42	4.6
13	A2	321.2	330.2	20X	74	36	6	40	5.1
14	A2	346.6	355.6	50X	77	35	0.5	42	5.5
15	A2	372.0	381.0	50X	80	35	0.5	42	6.0
16	A2	397.4	406.4	50X	80	35	0.5	42	6.4
18	A2	448.2	457.2	30Y	80	36		42	8.0
20	A2	499.0	508.0	30Y	80	36		42	9.1
22	A2	549.8	558.8	30Y	80	36		42	10.2
24	A2	600.6	609.6	60Y	84	39	1.5	45	11.6

A-3 w = 52

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	I	S1	S2		
2 1/2	A3	54.5	63.5	11U	47	71	19	21	1.1
2	A3	67.2	76.2	21U	48	32	19	25	1.1
3 1/2	A3	79.9	88.9	21U	50	32	19	28	1.3
4	A3	92.6	101.6	21U	57	32	19	32	1.7
4 1/2	A3	105.3	114.3	21U	57	32	19	32	2.0
5	A3	118.0	127.0	22U	59	32	19	32	2.1
5 1/2	A3	130.7	139.7	22U	63	32	19	35	2.4
6	A3	143.4	152.4	22U	63	32	19	35	2.7
6 1/2	A3	156.1	165.1	22U	63	32	19	35	2.9
7	A3	168.8	177.8	20X	75	52	12	42	3.9
8	A3	194.2	203.2	20X	75	52	12	42	4.4
9	A3	219.6	228.6	20X	75	50	10	42	4.8
10	A3	245.0	254.0	20X	75	50	10	42	5.2
11	A3	270.4	279.4	20X	75	50	10	42	5.7
12	A3	295.8	304.8	20X	75	50	8	42	6.1
13	A3	321.2	330.2	20X	80	50	8	42	6.9
14	A3	346.6	355.6	50X	80	42	5	42	7.2
15	A3	372.0	381.0	50X	86	42	5	48	7.9
16	A3	397.4	406.4	50X	86	42	5	48	8.9
18	A3	448.2	457.2	50Y	86	42	5	48	10.1
20	A3	499.0	508.0	50Y	86	44	4	48	11.5
22	A3	549.8	558.8	50Y	87	45	3.5	48	12.5
24	A3	600.6	609.6	50Y	92	48	2	50	15.3

NBK® Standard V-Pulley

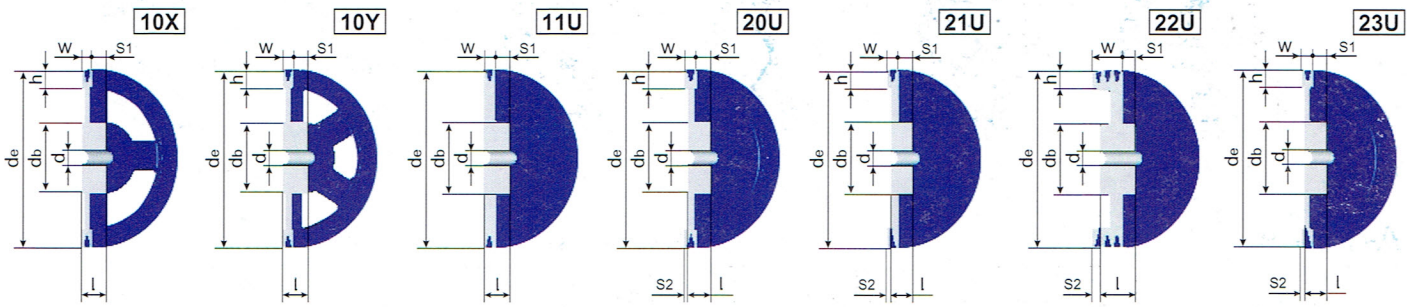

B-1 w = 24

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	l	S1	S2		
2 1/2 B1	52.5	63.5	11U	42	43	19		18	0.6
3 B1	65.2	76.2	21U	44	25	19	18	24	0.6
3 1/2 B1	77.9	88.9	21U	44	25	19	18	24	0.7
4 B1	90.6	101.6	21U	50	28	19	15	28	1.0
4 1/2 B1	103.3	114.3	23U	50	30	15	9	28	1.2
5 B1	116.0	127.0	23U	50	30	15	9	28	1.3
5 1/2 B1	128.7	139.7	23U	50	30	15	9	28	1.5
6 B1	141.4	152.4	23U	50	30	15	9	28	1.6
6 1/2 B1	154.1	165.1	20X	56	30	8	2	30	1.6
7 B1	166.8	177.8	10X	60	30	6		32	1.9
8 B1	192.2	203.2	10X	60	30	6		32	2.2
9 B1	217.6	228.6	10X	60	30	6		32	2.4
10 B1	243.0	254.0	10X	64	34	10		35	2.9
11 B1	268.4	279.4	10X	64	34	10		35	3.2
12 B1	293.8	304.8	10X	64	34	10		35	3.4
13 B1	319.2	330.2	10X	64	38	14		35	4.0
14 B1	344.6	355.6	10X	70	40	16		38	4.5
15 B1	370.0	381.0	10X	74	40	16		40	4.9
16 B1	395.4	406.4	10X	74	40	16		40	5.2
18 B1	446.2	457.2	10X	80	40	16		42	6.1
20 B1	497.0	508.0	10Y	80	40	16		42	8.0
22 B1	547.8	558.8	10Y	76	45	21		42	9.8
24 B1	598.6	609.6	10Y	76	45	21		42	10.8

B-2 w = 44

unit : mm


Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	l	S1	S2		
2 1/2 B2	52.5	63.5	11U	41	63	19		18	0.8
3 B2	65.2	76.2	21U	44	32	19	31	24	0.9
3 1/2 B2	77.9	88.9	21U	50	32	19	31	28	1.2
4 B2	90.6	101.6	21U	50	32	19	31	28	1.5
4 1/2 B2	103.3	114.3	21U	57	32	19	31	32	1.8
5 B2	116.0	127.0	22U	57	37	19	26	32	2.0
5 1/2 B2	128.7	139.7	22U	63	37	19	26	35	2.4
6 B2	141.4	152.4	22U	63	40	19	23	35	2.7
6 1/2 B2	154.1	165.1	22U	63	40	19	23	35	3.1
7 B2	166.8	177.8	20X	76	46	12	10	42	3.6
8 B2	192.2	203.2	20X	76	46	12	10	42	4.0
9 B2	217.6	228.6	20X	76	44	10	10	42	4.4
10 B2	243.0	254.0	20X	76	44	10	10	42	4.9
11 B2	268.4	279.4	20X	76	44	10	10	42	5.3
12 B2	293.8	304.8	20X	82	42	8	10	45	6.0
13 B2	319.2	330.2	20X	82	42	8	10	45	6.4
14 B2	344.6	355.6	50X	82	40		2	45	6.9
15 B2	370.0	381.0	50X	82	40		2	45	7.4
16 B2	395.4	406.4	50Y	86	40		2	48	8.2
18 B2	446.2	457.2	50Y	86	40		2	48	9.2
20 B2	497.0	508.0	50Y	87	40		2	48	10.6
22 B2	547.8	558.8	50Y	87	40		2	48	12.2
24 B2	598.6	609.6	60Y	92	50	3		50	14.3

B-3 w = 64

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	l	S1	S2		
3 B3	65.2	76.2	21U	50	35	19	48	25	1.3
3 1/2 B3	77.9	88.9	21U	50	35	19	48	28	1.6
4 B3	90.6	101.6	21U	57	35	19	48	32	2.0
4 1/2 B3	103.3	114.3	21U	63	35	19	48	35	2.4
5 B3	116.0	127.0	21U	63	42	20	42	35	3.1
5 1/2 B3	128.7	139.7	22U	69	42	20	42	38	3.2
6 B3	141.4	152.4	22U	69	42	22	44	38	3.5
6 1/2 B3	154.1	165.1	22U	69	42	22	44	38	3.9
7 B3	166.8	177.8	20X	76	57	12	19	42	4.6
8 B3	192.2	203.2	20X	76	57	12	19	42	5.3
9 B3	217.6	228.6	20X	76	55	10	19	42	5.8
10 B3	243.0	254.0	20X	76	55	10	19	42	6.4
11 B3	268.4	279.4	20X	76	55	10	19	42	7.0
12 B3	293.8	304.8	20X	82	53	8	19	45	7.7
13 B3	319.2	330.2	20X	82	53	8	19	45	8.4
14 B3	344.6	355.6	50X	88	45		9.5	48	8.8
15 B3	370.0	381.0	50Y	88	45		9.5	48	10.1
16 B3	395.4	406.4	50Y	88	50		7	48	10.9
18 B3	446.2	457.2	50Y	90	50		7	50	12.9
20 B3	497.0	508.0	50Y	90	50		7	50	14.3
22 B3	547.8	558.8	50Y	93	50		7	50	16.3
24 B3	598.6	609.6	60Y	93	50		7	50	17.8

NBK® Standard V-Pulley

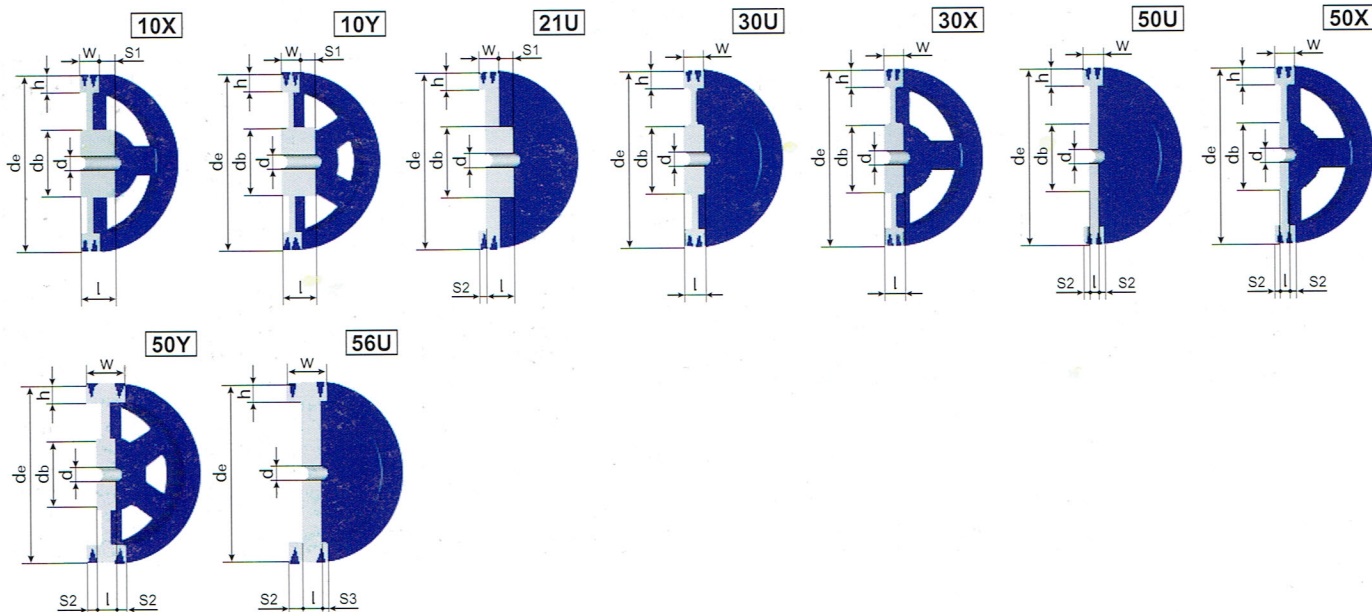

B-4 w = 84

unit : mm B-5 w = 104

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	l	S1	S2		
4	B4	90.6	21U	63	46	19	57	35	2.7
4 1/2	B4	103.3	21U	63	46	19	57	35	3.2
5	B4	116.0	21U	69	48	22	58	40	4.0
5 1/2	B4	128.7	21U	69	48	22	58	38	4.6
6	B4	141.4	22U	69	48	22	58	38	4.2
6 1/2	B4	154.1	22U	69	50	22	56	38	4.7
7	B4	166.8	50X	82	55		14.5	45	5.7
8	B4	192.2	50X	82	55		14.5	45	6.4
9	B4	217.6	50X	82	55		14.5	45	7.1
10	B4	243.0	50X	88	56		14	48	8.1
11	B4	268.4	50X	88	57		13.5	48	8.9
12	B4	293.8	50X	88	57		13.5	48	9.6
13	B4	319.2	50X	88	57		13.5	48	10.3
14	B4	344.6	50Y	94	57		13.5	50	11.6
15	B4	370.0	50Y	94	58		13	50	12.7
16	B4	395.4	50Y	94	58		13	50	13.5
18	B4	446.2	50Y	95	58		13	50	15.2
20	B4	497.0	50Y	95	58		13	50	16.9
22	B4	547.8	50Y	97	62		11	50	19.3
24	B4	598.6	50Y	102	62		11	55	21.6

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	l	S1	S2		
5	B5	116.0	21U	69	47	22	79	38	4.5
5 1/2	B5	128.7	21U	75	53	22	73	42	5.0
6	B5	141.4	22U	75	53	22	73	42	5.5
6 1/2	B5	154.1	22U	77	53	24	75	42	6.0
7	B5	166.8	50X	85	64		20	45	6.5
8	B5	192.2	50X	85	66		19	45	7.0
9	B5	217.6	50X	90	66		19	50	9.0
10	B5	243.0	50X	95	66		19	50	10.0
11	B5	268.4	50X	95	66		19	50	11.0
12	B5	293.8	50X	95	66		19	50	11.5
13	B5	319.2	50X	95	68		18	50	12.0
14	B5	344.6	50Y	97	68		18	50	14.0
15	B5	370.0	50Y	97	68		18	50	15.0
16	B5	395.4	50Y	100	69		17.5	55	16.0

unit : mm

C-2 w = 58

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	I	S1	S2		
5 C2	113.0	127.0	22U	65.0	42.0	22.0	38.0	36.0	3.0
6 C2	138.4	152.4	22U	68.0	42.0	22.0	38.0	37.0	4.1
7 C2	163.8	177.8	20X	74.0	42.0	8.0	8.0	41.0	4.7
8 C2	189.2	203.2	50X	90.0	42.0	8.0	8.0	50.0	5.2
9 C2	214.6	228.6	50X	90.0	42.0	8.0	8.0	50.0	5.9
10 C2	240.0	254.0	50X	90.0	42.0	8.0	8.0	50.0	6.4
11 C2	265.4	279.4	50X	90.0	44.0	7.0	7.0	50.0	7.7
12 C2	290.8	304.8	50X	90.0	44.0	7.0	7.0	50.0	8.3
13 C2	316.2	330.2	50X	90.0	44.0	7.0	7.0	50.0	9.0
14 C2	341.6	355.6	50X	90.0	44.0	7.0	7.0	50.0	10.2
15 C2	367.0	381.0	50X	100.0	44.0	7.0	7.0	55.0	12.2

C-3 w = 84

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	I	S1	S2		
5 C3	113.0	127.0	56U	48	24	12	48	4.3	
5 1/2 C3	125.7	139.7	56U	48	24	12	55	5.3	
6 C3	138.4	152.4	56U	48	24	12	60	6.3	
6 1/2 C3	151.1	165.1	56U	48	24	12	70	7.4	
7 C3	163.8	177.8	56U	48	24	12	75	8.6	
8 C3	189.2	203.2	50U	88	60	12	48	7.9	
9 C3	214.6	228.6	50U	92	64	10	50	9.4	
10 C3	240.0	254.0	50U	92	64	10	50	10.4	
11 C3	265.4	279.4	50U	95	64	10	50	11.8	
12 C3	290.8	304.8	50X	95	64	10	50	11.8	
13 C3	316.2	330.2	50X	98	64	10	50	13.1	
14 C3	341.6	355.6	50X	98	64	10	50	14.0	
15 C3	367.0	381.0	50Y	100	64	10	55	15.6	
16 C3	392.4	406.4	50Y	100	64	10	55	17.0	
18 C3	443.2	457.2	50Y	100	64	10	55	18.9	
20 C3	494.0	508.0	50Y	100	70	7	55	21.6	

C-4 w = 110

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	I	S1	S2		
5 C4	113.0	127.0	56U	64	30	16	48	5.6	
5 1/2 C4	125.7	139.7	56U	64	30	16	55	6.9	
6 C4	138.4	152.4	56U	64	30	16	60	8.2	
6 1/2 C4	151.1	165.1	56U	64	30	16	70	9.7	
7 C4	163.8	177.8	56U	64	30	16	75	11.3	
8 C4	189.2	203.2	50U	95	74	18	50	10.4	
9 C4	214.6	228.6	50U	95	74	18	50	11.6	
10 C4	240.0	254.0	50U	95	76	17	50	13.1	
11 C4	265.4	279.4	50U	98	76	17	50	14.8	
12 C4	290.8	304.8	50U	98	76	17	50	16.3	
13 C4	316.2	330.2	50U	102	76	17	55	18.1	
14 C4	341.6	355.6	50Y	102	76	17	55	18.0	
15 C4	367.0	381.0	50Y	105	76	17	55	19.5	
16 C4	392.4	406.4	50Y	108	76	17	60	21.3	
18 C4	443.2	457.2	50Y	108	76	17	60	23.7	
20 C4	494.0	508.0	50Y	108	82	14	60	26.5	

C-5 w = 136

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	I	S1	S2		
5 C5	113.0	127.0	56U	64	47	25	48	6.3	
5 1/2 C5	125.7	139.7	56U	64	47	25	55	7.7	
6 C5	138.4	152.4	56U	64	50	22	60	9.1	
6 1/2 C5	151.1	165.1	56U	64	50	22	70	10.7	
7 C5	163.8	177.8	56U	64	50	22	75	12.4	
8 C5	189.2	203.2	50U	95	86	25	50	12.4	
9 C5	214.6	228.6	50U	95	86	25	50	14.0	
10 C5	240.0	254.0	50U	98	86	25	50	15.9	
11 C5	265.4	279.4	50U	98	86	25	50	17.7	
12 C5	290.8	304.8	50U	100	88	24	55	19.8	
13 C5	316.2	330.2	50U	106	88	24	55	22.3	
14 C5	341.6	355.6	50Y	106	88	24	55	22.1	
15 C5	367.0	381.0	50Y	114	88	24	60	24.3	

C-6 w = 162

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore	Mass (kg)
				db	I	S1	S2		
7 C6	163.8	177.8	56U	66	60	36	75	13.7	
8 C6	189.2	203.2	50U	95	100	31	50	14.5	
9 C6	214.6	228.6	50U	102	100	31	55	17.0	
10 C6	240.0	254.0	50U	102	100	31	55	18.9	
11 C6	265.4	279.4	50U	108	100	31	60	21.6	
12 C6	290.8	304.8	50U	108	100	31	60	23.7	
13 C6	316.2	330.2	50U	114	100	31	60	26.5	
14 C6	341.6	355.6	50Y	114	100	31	60	26.2	
15 C6	367.0	381.0	50Y	120	100	31	65	28.6	

NBK® Big Hub V-Pulley

A-1-H w = 20


unit : mm

Catalog Number	dp	de	Type	Hub				MAX Bore (d)	Weight (kg)	
				db	l	S1	S2			
3	A1H	67.2	76.2	21U	65	24	17	13	36	0.9
3 1/2	A1H	79.9	88.9	21U	65	24	19	15	36	1.0
4	A1H	92.6	101.6	21U	65	28	19	11	36	1.2
4 1/2	A1H	105.3	114.3	21U	65	28	15	7	36	1.3
5	A1H	118.0	127.0	21U	65	30	17	7	36	1.5
5 1/2	A1H	130.7	139.7	21U	65	30	17	7	36	1.7
6	A1H	143.4	152.4	20X	65	38	20	2	36	1.6
6 1/2	A1H	156.1	165.1	20X	65	38	20	2	36	1.7
7	A1H	168.8	177.8	20X	65	38	20	2	36	1.8
8	A1H	194.2	203.2	20X	65	38	20	2	36	2.1
9	A1H	219.6	228.6	20X	65	38	20	2	36	2.3
10	A1H	245.0	254.0	10X	70	38	18	2	36	2.9

A-2-H w = 36

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore (d)	Weight (kg)	
				db	l	S1	S2			
3	A2H	67.2	76.2	21U	65	30	19	25	36	1.2
3 1/2	A2H	79.9	88.9	21U	65	30	19	25	36	1.3
4	A2H	92.6	101.6	21U	65	30	19	25	36	1.6
4 1/2	A2H	105.3	114.3	21U	65	30	19	25	36	1.8
5	A2H	118.0	127.0	21U	76	30	19	25	42	2.1
5 1/2	A2H	130.7	139.7	21U	76	30	19	25	42	2.3
6	A2H	143.4	152.4	21U	76	30	19	25	42	2.5
6 1/2	A2H	156.1	165.1	21U	76	30	19	25		2.7
7	A2H	168.8	177.8	20X	69	57	29	8		3.2
8	A2H	194.2	203.2	20X	69	57	29	8		3.6
9	A2H	219.6	228.6	20X	69	57	27	6		4.0
10	A2H	245.0	254.0	20X	69	57	27	6		4.3
11	A2H	270	279.4	20X	98	63	33	6		6.5
12	A2H	296	304.8	20X	98	61	31	6		6.8
13	A2H	321	330.2	20X	98	61	31	6		7.3
14	A2H	347	355.6	20X	98	60	24.5	0.5		7.6
15	A2H	372	381.0	50X	97	60	24.5	0.5	53	8.9

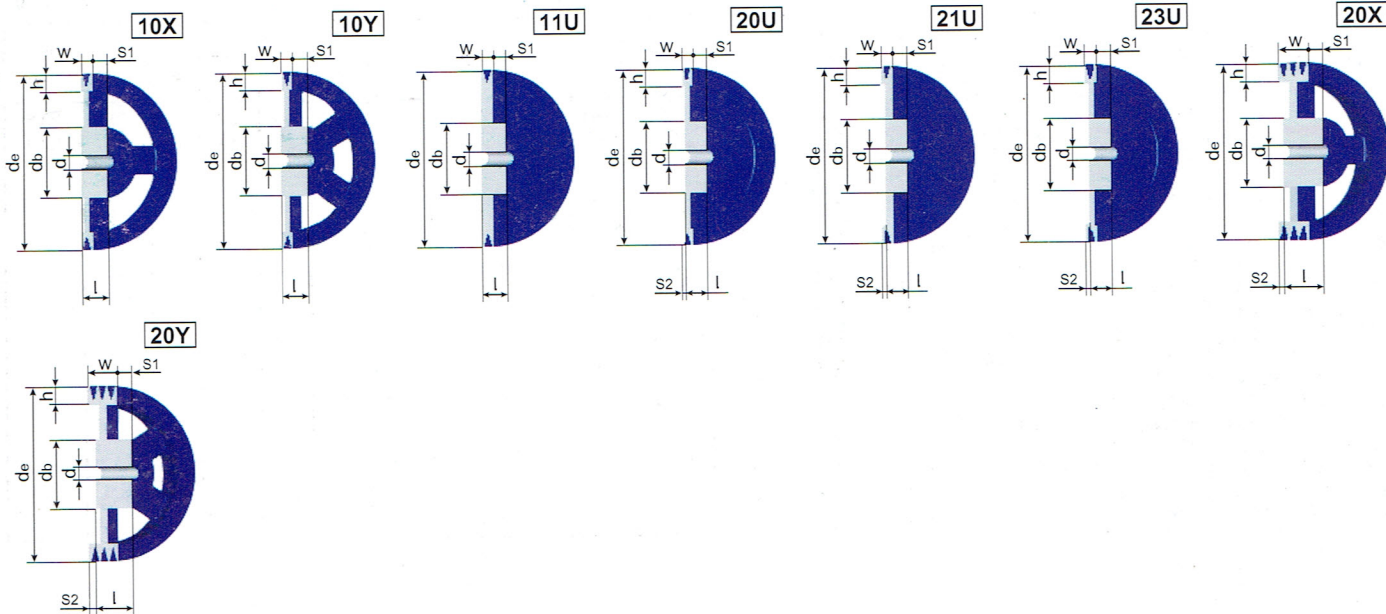

B-1-H w = 24

unit : mm

Catalog Number	dp	de	Type	Hub				Pilot Bore (d)	Weight (kg)
				db	I	S1	S2		
4	B1H	90.6	101.6	21U	65	28	19	9.0	1.3
4 1/2	B1H	103.3	114.3	23U	65	30	15	9.0	1.5
5	B1H	116.0	127.0	23U	65	30	15	9.0	1.6
5 1/2	B1H	128.7	139.5	23U	65	30	15	9.0	1.8
6	B1H	141.4	152.4	23X	80	30	15	9.0	2.2
6 1/2	B1H	154.1	165.1	20X	80	30	8	2.0	2.3
7	B1H	166.8	177.8	10X	80	30	6	0.0	2.3
8	B1H	192.2	203.2	10X	80	30	6	0.0	2.6
9	B1H	217.6	228.6	10X	80	30	6	0.0	2.8
10	B1H	243.0	254.0	10X	85	34	10	0.0	3.4
12	B1H	293.8	304.8	10X	85	34	10	0.0	4.0
13	B1H	319.2	330.2	10X	97	38	14	0.0	5.1
14	B1H	344.6	355.6	10X	97	40	16	0.0	5.5
15	B1H	370.0	381.0	10X	97	40	16	0.0	5.8
16	B1H	395.4	406.4	10X	97	40	16	0.0	6.1

B-2-H w = 44

unit : mm

Catalog Number	dp	de	Type	Hub				Pilot Bore (d)	Weight (kg)
				db	I	S1	S2		
3	B2H	65.2	76.2	21U	65	32	19	31	1.3
3 1/2	B2H	77.9	88.9	21U	65	32	19	31	1.5
4	B2H	90.6	101.6	21U	65	37	19	26	1.9
5	B2H	116.0	127.0	21U	86	37	19	26	2.9
5 1/2	B2H	128.7	139.7	21U	86	37	19	23	3.1
6	B2H	141.4	152.4	21U	86	40	19	23	3.5
6 1/2	B2H	154.1	165.1	21U	86	40	19	10	3.9
7	B2H	166.8	177.8	20X	86	51	17	10	4.2
8	B2H	192.2	203.2	20X	86	51	17	10	4.6
9	B2H	217.6	228.6	20X	97	51	17	10	5.7
10	B2H	243.0	254.0	20X	97	70	36	10	7.2
11	B2H	268.4	279.4	20X	97	70	36	10	7.6
12	B2H	293.8	304.8	20X	97	70	36	10	8.2
13	B2H	319.2	330.2	20X	97	70	36	10	8.6
14	B2H	344.6	355.6	20X	97	70	28	2	9.1
15	B2H	370.0	381.0	20X	97	70	28	2	9.6
16	B2H	395.4	406.4	20Y	97	70	28	2	10.3
18	B2H	446.2	457.2	20Y	108	70	28	2	12.2
20	B2H	497.0	508.0	20Y	108	70	28	2	13.5

B-3-H w = 64

unit : mm

Catalog Number	dp	de	Type	Hub				Max Bore (d)	Weight (kg)
				db	I	S1	S2		
4	B3H	90.6	101.6	21U	77	35	19	48	2.5
5	B3H	116.0	127.0	21U	86	63	20	21	4.8
5 1/2	B3H	128.7	139.7	21U	86	63	20	21	4.7
6	B3H	141.4	152.4	21U	86	63	22	23	5.0
6 1/2	B3H	154.1	165.1	21U	86	63	22	23	5.4
7	B3H	166.8	177.8	20U	97	63	12	13	6.1
8	B3H	192.2	203.2	20U	97	63	12	13	6.8
9	B3H	217.6	228.6	20U	97	70	25	19	7.8
10	B3H	243.0	254.0	20U	97	70	25	19	8.4
11	B3H	268.4	279.0	20X	97	70	25	19	9.0
12	B3H	293.8	304.8	20X	97	70	25	19	9.4
13	B3H	319.2	330.2	20X	97	70	25	19	10.1
14	B3H	334.6	355.6	20X	108	70	15.5	9.5	11.5
15	B3H	370.0	381.0	20Y	118	76	21.5	9.5	14.2
16	B3H	395.4	406.4	20Y	140	76	19	7	17.2
18	B3H	446.2	457.2	20Y	140	76	19	7	19.1
20	B3H	497.0	508.0	20Y	140	76	19	7	20.5
22	B3H	547.8	558.8	20Y	140	76	19	7	22.4
24	B3H	598.6	609.6	20Y	140	76	19	7	23.9

B-4-H w = 84

unit : mm

Catalog Number	dp	de	Type	Hub				Pilot Bore (d)	Weight (kg)
				db	I	S1	S2		
14	B4H	344.6	355.6	50Y	140	90	16	10	20.5
16	B4H	395.4	406.4	50Y	140	90	16	10	22.4